specifications


SIX BEFRIGERATION

SKB1200NS-A Series

ActiveCore Series, 2 Door (Solid), Upright Fridge

Project:

Item No:

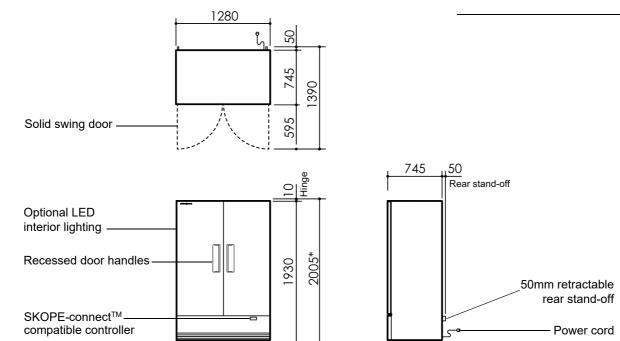

Floor clearance

4 × 100mm high swivel castors (front lockable) (Ø70 wheel)

CABINET

Sign

Doors 2 × lockable, self-closing, foamed, solid swing doors (hinged LH, RH)

Internal door opening 2 × door openings: 1454mm high × 525mm wide

Shelves 8 × wire and 2 × stainless steel

Wire shelves: Adjustable height, 577mm wide × 520mm deep

Stainless steel bottom shelf: Not adjustable, 580mm wide × 515mm deep

n.a.

Material Powdercoat galvanized steel or stainless steel interior & exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)

GEMS class 5M

GEMS energy consumption 2.93 kWh/24h

GEMS annual running cost 321 p.a.(@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class 5

Interior side lighting No interior lights or with interior lights: 2 × 1370mm, 15W LED

Interior shelf lighting n.a.
Sign lighting n.a.

Power cord Supplied with 2.0m, 10 Amp plug and lead Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 3.0 Amps (includes unit 2.6 Amps)

REFRIGERATION

Controller | SCS Connect (SKOPE-connectTM compatible)

Connectivity interface Bluetooth

Refrigeration system Bottom mounted, integral, removable ActiveCore refrigeration unit

(UBHCNI-0008)

Refrigerant R290 / 99g (natural refrigerant)

Nominal capacity 740 Watts

Heat rejection (Avg/peak) 120 Watts/150 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DIMENSIONS			
	External	Internal	
Height	2005mm*	1454mm	
Width	1280mm	1180mm	
Depth	795mm	602mm	
Floor area	1.08m ²	•	
Weight	245kg		
Volume	1079L		
Net volume	801L		

*Height 2005mm includes top door hinges

Dimensional tolerances						
Before installing this cabinet allow the following dimensional tolerances:						
Linear dimensions	Overall cabinet di	imensions				
Less than 1 metre	±5mm					
More than 1 metre	-5mm to +10mm					
	Length of multiple cabinets					
	At each joint	At each end wall				
Less than 1 metre	±5mm	+15mm				
More than 1 metre	-5mm to +10mm	+15mm				

Ventilation re	ntilation requirements		
Тор	50mm		
Sides	Not required		
Back	50mm		
Bottom	50mm		

PSS0580 Rev. 2.1 Mar. 202

