

## Countertop Fryer W.FRSxx / W.FRTxx



### Product Information:




- Mechanical thermostat temperature control
- Designed for 180°C frying
- Suitable for use with liquid oil only
- Over temperature safety cut-out as standard
- Stainless steel element covers
- Basket holder at rear for draining
- Removable splash guard
- Removable tilting element assembly
- Easily removable oil tank
- Snug fitting stainless steel tank cover
- Drip tray supplied complete with basket(s)
- Power on and indicator light

### Specifications:

|                 |                                         |                                          |
|-----------------|-----------------------------------------|------------------------------------------|
| <b>Model</b>    | <b>W.FRS50</b>                          | <b>W.FRS80</b>                           |
| <b>Height</b>   | 355mm                                   | 384mm                                    |
| <b>Width</b>    | 285mm                                   | 285mm                                    |
| <b>Depth</b>    | 483mm (619mm with basket)               | 483mm (619mm with basket)                |
| <b>Power</b>    | 2.2kW<br>10A plug & lead fitted         | 3.2kW<br>15A plug & lead fitted          |
| <b>Capacity</b> | 5 Litre<br>8.5kg/hr (frozen 10mm chips) | 8 Litre<br>11.5kg/hr (frozen 10mm chips) |

|                 |                                                                     |                                                                     |
|-----------------|---------------------------------------------------------------------|---------------------------------------------------------------------|
| <b>Model</b>    | <b>W.FRT50</b>                                                      | <b>W.FRT80</b>                                                      |
| <b>Height</b>   | 355mm                                                               | 384mm                                                               |
| <b>Width</b>    | 550mm                                                               | 550mm                                                               |
| <b>Depth</b>    | 483mm (619mm with basket)                                           | 483mm (619mm with basket)                                           |
| <b>Power</b>    | 2 x 2.2kW<br>2 x 10A plug & lead fitted<br>*2 separate 10A circuits | 2 x 3.2kW<br>2 x 15A plug & lead fitted<br>*2 separate 15A circuits |
| <b>Capacity</b> | 2 x 5 Litre<br>2 x 8.5kg/hr (frozen 10mm chips)                     | 2 x 8 Litre<br>2 x 11.5kg/hr (frozen 10mm chips)                    |

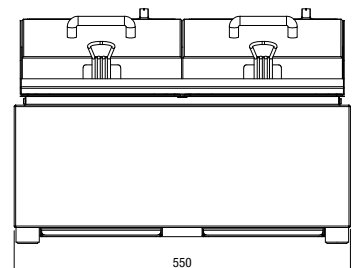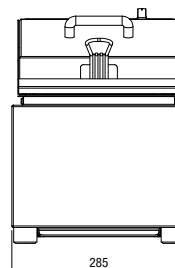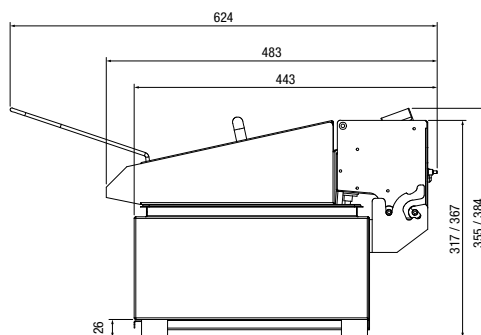

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: C - 28/08/2020

[www.stoddart.com.au](http://www.stoddart.com.au)

[www.stoddart.co.nz](http://www.stoddart.co.nz)