


specifications

RF7.UPF.1.SD

ReFlex Series, 1 Solid Door, Upright Freezer

Project: _____

Item No: _____

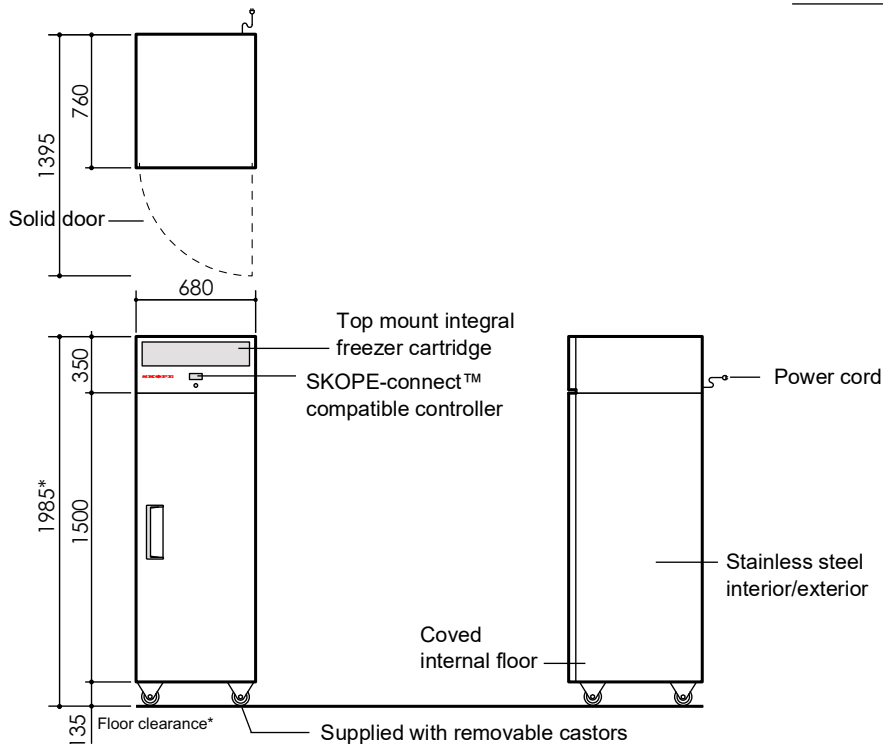

CABINET

Doors	1 × self-closing, lockable, reversible, solid swing door. Supplied RH
Internal door opening	1 × door openings: 1375 mm high × 555 mm wide
Shelves	5 × adjustable height shelves: 540 mm wide × 530 mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp.	40°C
Temperature range	-21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)
GEMS class	5L1
GEMS energy consumption	7.40 kWh/24 h
GEMS annual running cost	\$811 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class	5
Interior lighting	1 × 1200 mm, 12W LED light (door activated)
Power cord	Supplied with a 10 amp plug and 2 m lead
Power supply	220-240 volts a.c. 50 Hz, single phase supply
Current draw	4.0 amps (includes unit 3.9 amps)

REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth wireless technology
Refrigeration system	Top mounted, integral, removable freezer cartridge (part number UTKDNI-0019)
Refrigerant	R290/94 g (natural refrigerant)
Nominal capacity	550 watts
Heat rejection (avg/peak)	310 watts/430 watts
Drainage	No plumbing required

DIMENSIONS

	External	Internal
Height	1985 mm*	1395 mm
Width	680 mm	560 mm
Depth	760 mm	600 mm
Floor area	0.52 m ²	
Weight	122 kg	
Gross volume	469 L	
Net volume	363 L	

* With supplied castors fitted. See height variation below

Height variation

Supplied castors	1985 mm
Height adjustable legs	1995 to 2035 mm
No castors or legs	1850 mm

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

Ventilation requirements

Top	300 mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673
Email: skope@skope.com, Website: www.skope.com

PSS0590 Rev. 2.22 Apr. 2023

